


*DESIGN IMPEDANCE = 5.75%

SUNBELT TRANSFORMER

DRY TYPE TRANSFORMER CLASS AA

KVA	300	3 PHASE	HERTZ	60	%IZ	*	°C RISE	150°C
H.V.	4160 Δ	30 KV BIL.	AMPS	41.6	WGFI	2100	LBS.	
L.V.	208Y/120	10 KV BIL.	AMPS	832.7	NO.	A61507		

H.V. TAP	VOLTS
1-2	4368
2-3	4264
1-4	4160
3-4	4056
3-6	
4-5	3952
5-6	

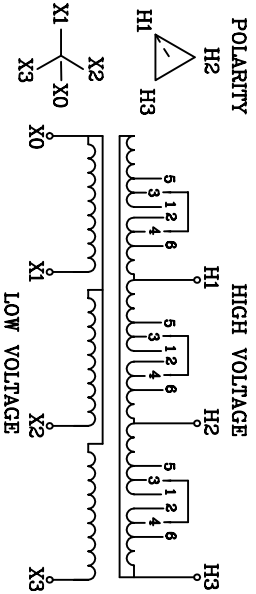


DE-ENERGIZE TRANSFORMER BEFORE CHANGING TAPS

NP-310SUN



SPECIFICATIONS

- 1) NEMA 1 INDOOR ENCLOSURE ASA 61 GRAY, POWDER COAT FINISH
- 2) ALUMINUM WOUND
- 3) 220°C INSULATION
- 4) VACUUM PRESSURE IMPREGNATION

L.V. TERMINAL DETAIL
.25" X 3" ALUMINUM



H.V. TERMINAL DETAIL
.25" X 1.5" ALUMINUM



SUNBELT TEMPLE, TX SHARDN, PA BAKERSFIELD, CA
transformer 1-800-433-3128

TITLE: DRY TYPE TRANSFORMER SPECIFICATIONS AND DIMENSIONAL DATA
DATE: 1/13/05
DRAWN BY: BRP
CUSTOMER: DRAWING NO.: A61507

38963-A