
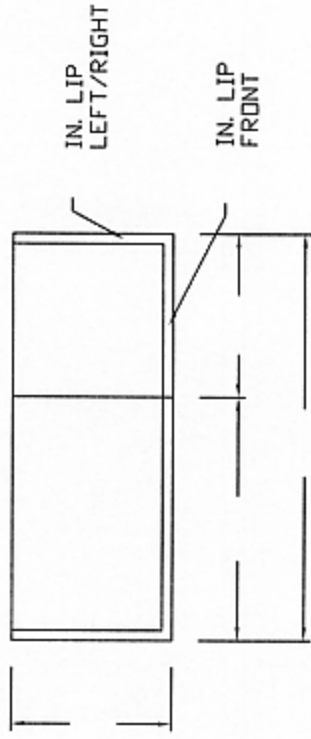


ACROSS RADIATORS IF APPLICABLE

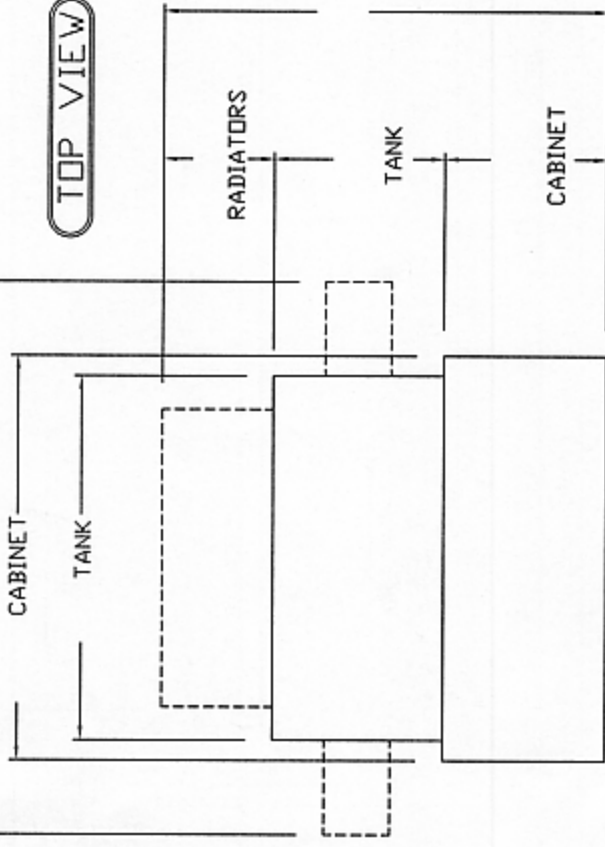

SPECIFICATIONS


VOLTAGE RATING KVA:
 HV: _____ LV: _____

TEMPERATURE RISE: 65°C
 CONDUCTOR: CU OR AL

FEATURES

- | | | |
|--------------------------|--------------------------|----------------------------|
| YES | NO | |
| <input type="checkbox"/> | <input type="checkbox"/> | DEAD FRONT |
| <input type="checkbox"/> | <input type="checkbox"/> | FUSES? WHAT TYPE: _____ |
| <input type="checkbox"/> | <input type="checkbox"/> | SWITCHES? WHAT TYPE: _____ |
| <input type="checkbox"/> | <input type="checkbox"/> | LIQUID TEMPERATURE |
| <input type="checkbox"/> | <input type="checkbox"/> | LIQUID LEVEL GAUGE |
| <input type="checkbox"/> | <input type="checkbox"/> | PRESSURE VACUUM |

COMMENTS: _____

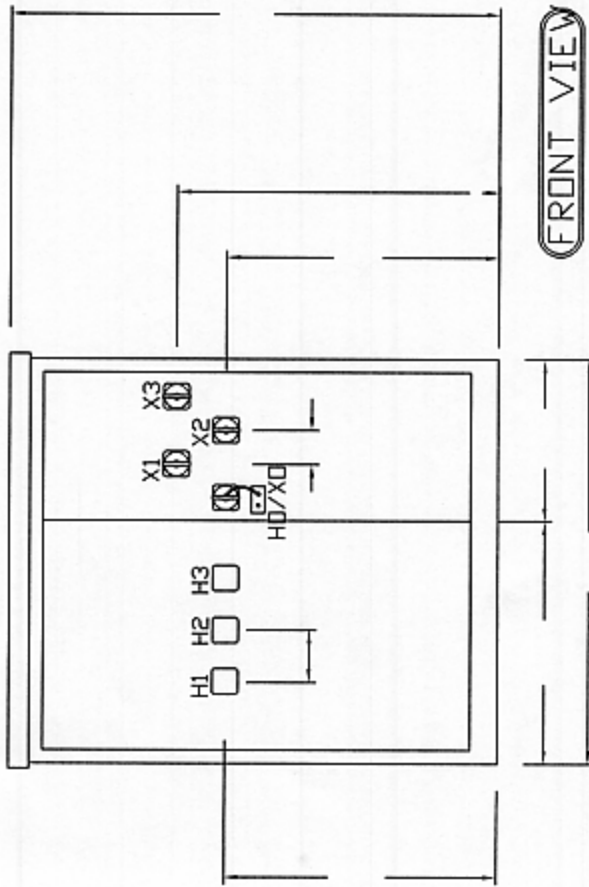

SUNBELT
 TRANSFORMER

CUSTOMER _____

TITLE: Radial Feed with Common HO/XO Bushing/ LV Staggered

DATE:	SCALE: NONE	DRAWN BY:	APPROVED:	DRAWING NO:
-------	----------------	-----------	-----------	-------------