
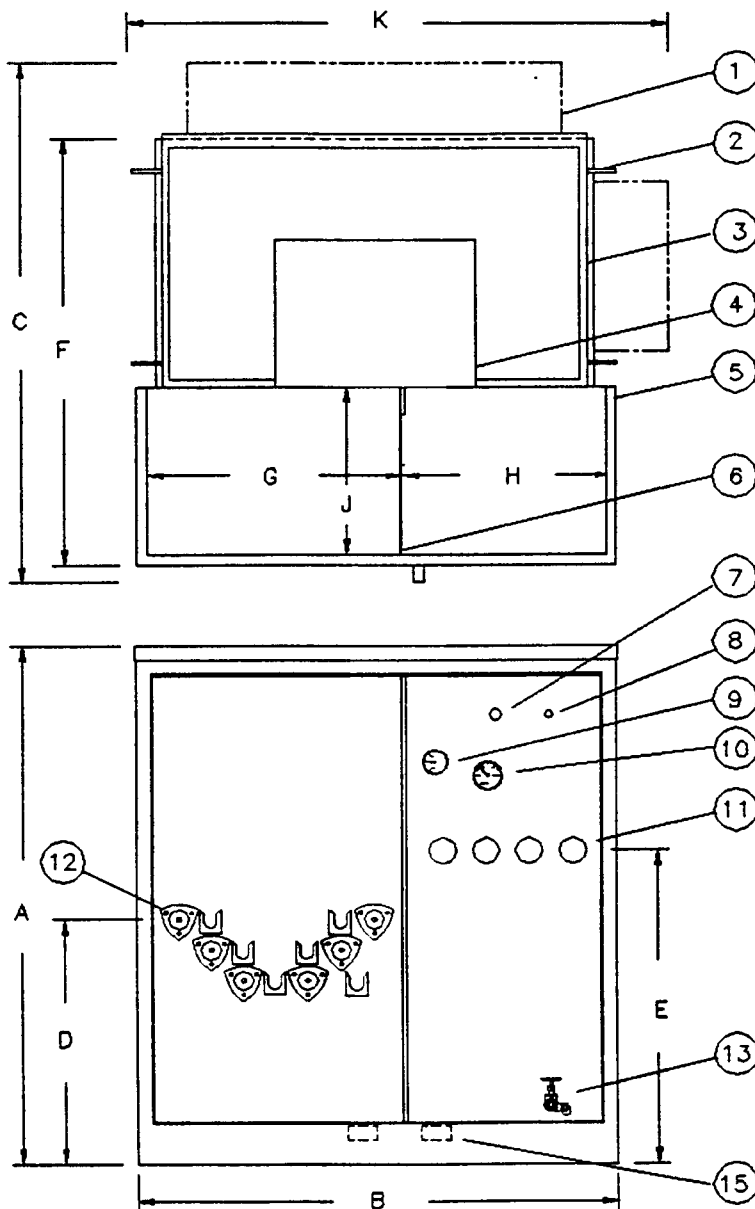


THREE PHASE PADMOUNTED TRANSFORMER (WITH OPTIONAL FUSING \*)  
 LOOP FEED-DEAD FRONT-125 BIL (HIGH VOLTAGE 25 KV AND BELOW)

\* BAYONET FUSING MAY NOT BE APPLICABLE TO SOME UNITS



ITEM	DESCRIPTION
1	COOLING PANELS
2	LIFTING LUGS
3	PROVISIONS FOR JACKING
4	HANDHOLE WITH COVER
5	CABINET
6	STEEL HI/LO BARRIER
7	1" NPT FILL/FILTER PRESS CONNECTION
8	PRESSURE RELIEF VALVE
9	LIQUID LEVEL GAUGE
10	LIQUID TEMP. GAUGE
11	LV BUSHINGS
12	DEAD FRONT HV BUSHINGS
13	DRAIN VALVE WITH SAMPLER
14	1/2"-13 GROUND PADS

NOTE: DIMENSIONS ARE FOR REFERENCE, NOT FOR CONSTRUCTION

KVA	A	B	C	D	E	F	G	H	J	K	WT	GAL
500	75.75	67.75	61.81	38.00	44.50	52.06	36.50	28.25	20.00	69.75	6887	335
750	79.00	67.75	76.06	38.00	44.50	55.81	36.50	28.25	20.00	69.75	6887	335
1000	79.00	69.25	79.81	40.00	46.00	59.56	36.50	29.75	20.00	71.25	9693	448
1500	79.00	70.50	78.31	40.00	46.00	61.56	37.75	29.75	20.00	74.50	12474	564
2000	86.00	72.50	90.06	48.00	55.00	66.31	36.50	33.00	24.00	76.50	15687	631
2500	86.00	75.50	90.31	47.00	55.00	66.56	39.50	33.00	24.00	79.50	16851	707