
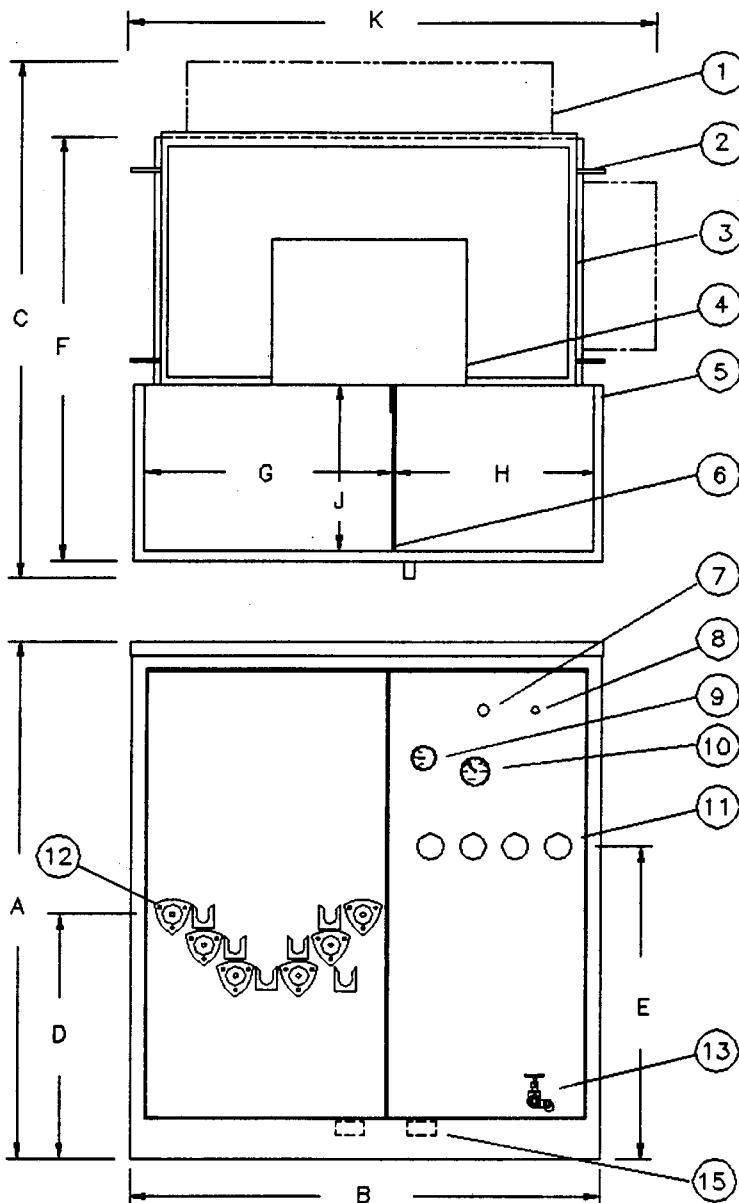


THREE PHASE PADMOUNTED TRANSFORMER (WITH OPTIONAL FUSING *)
 LOOP FEED-DEAD FRONT-95 BIL AND BELOW (HIGH VOLTAGE 15 KV AND BELOW)

* BAYONET FUSING MAY NOT BE APPLICABLE TO SOME UNITS



ITEM	DESCRIPTION
1	COOLING PANELS
2	LIFTING LUGS
3	PROVISIONS FOR JACKING
4	HANDHOLE WITH COVER
5	CABINET
6	STEEL HI/LO BARRIER
7	1" NPT FILL/FILTER PRESS CONNECTION
8	PRESSURE RELIEF VALVE
9	LIQUID LEVEL GAUGE
10	LIQUID TEMP. GAUGE
11	LV BUSHINGS
12	DEAD FRONT HV BUSHINGS
13	DRAIN VALVE WITH SAMPLER
14	1/2"-13 GROUND PADS

NOTE: DIMENSIONS ARE FOR REFERENCE, NOT FOR CONSTRUCTION

KVA	A	B	C	D	E	F	G	H	J	K	WT	GAL
500	75.75	67.75	61.81	38.00	44.50	52.06	36.50	28.25	20.00	69.75	6887	335
750	75.75	67.75	68.81	38.00	44.50	52.06	36.50	28.25	20.00	69.75	6887	335
1000	79.00	67.75	76.06	38.00	44.50	55.81	36.50	28.25	20.00	69.75	6887	335
1500	79.00	68.75	74.31	38.00	46.00	57.56	36.50	29.25	20.00	72.75	10259	406
2000	79.00	69.50	82.81	41.00	48.00	62.56	36.50	29.75	24.00	73.75	12460	504
2500	86.00	72.50	90.06	48.00	55.00	66.31	36.50	33.00	24.00	76.50	15687	521
3000	86.00	75.50	90.31	47.00	55.00	66.56	39.50	33.00	24.00	79.50	16672	690
3750	86.00	72.50	89.31	46.50	58.50	65.56	36.50	33.00	24.00	87.00	18360	707