
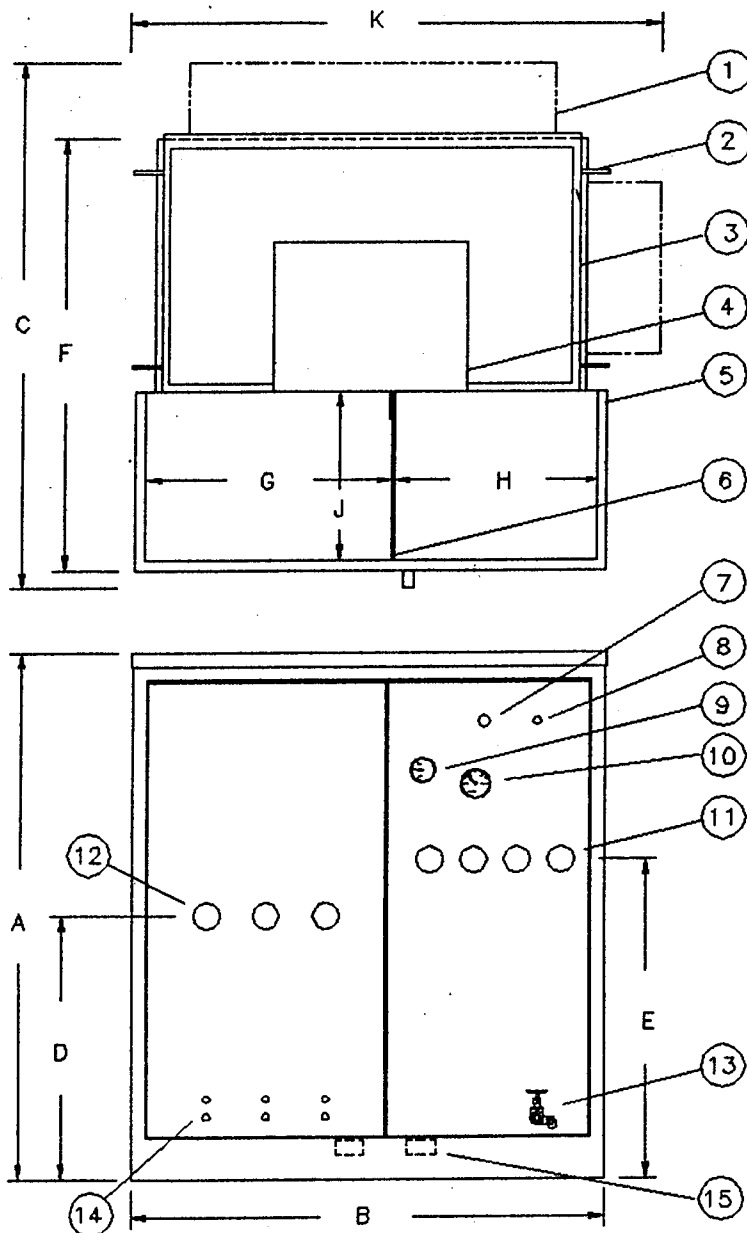


THREE PHASE PADMOUNTED TRANSFORMER (WITH OPTIONAL FUSING *)

RADIAL FEED-LIVE/DEAD FRONT-95 KV BIL AND BELOW (HIGH VOLTAGE 15 KV AND BELOW)

* BAYONET FUSING MAY NOT BE APPLICABLE TO SOME UNITS



ITEM	DESCRIPTION
1	COOLING PANELS
2	LIFTING LUGS
3	PROVISIONS FOR JACKING
4	HANDHOLE WITH COVER
5	CABINET
6	STEEL HI/LO BARRIER
7	1" NPT FILL/FILTER PRESS CONNECTION
8	PRESSURE RELIEF VALVE
9	LIQUID LEVEL GAUGE
10	LIQUID TEMP. GAUGE
11	LV BUSHINGS
12	HV BUSHINGS
13	DRAIN VALVE WITH SAMPLER
14	PROVISIONS FOR ARRESTERS
15	1/2"-13 GROUND PADS

NOTE: DIMENSIONS ARE FOR REFERENCE, NOT FOR CONSTRUCTION

KVA	A	B	C	D	E	F	G	H	J	K	WT	GAL
500	75.75	64.25	61.81	38.00	44.50	52.06	33.00	28.25	20.00	66.25	6607	319
750	75.75	64.25	68.81	38.00	44.50	52.06	33.00	28.25	20.00	66.25	6800	319
1000	79.00	64.25	76.06	38.00	44.50	55.81	33.00	28.25	20.00	66.25	7350	319
1500	79.00	61.25	74.31	38.00	46.00	57.56	29.00	29.25	20.00	65.25	9939	389
2000	79.00	66.00	82.81	41.00	48.00	62.56	33.25	29.75	24.00	70.00	12240	487
2500	86.00	69.00	90.06	48.00	55.00	66.31	33.00	33.00	24.00	73.00	15440	614
3000	86.00	75.50	90.31	47.00	55.00	66.56	39.50	33.00	24.00	79.50	16672	690
3750	86.00	71.50	89.31	46.50	58.50	65.56	35.50	33.00	24.00	86.00	18168	665