DESCRIPTION	
1	LV BUSH. & 4 HOLE SPADE
3	1/2-13 GROUND PAD
4	WARCO HV PORC 75BIL W/2H G-SPA
7	NP ON DOOR SER ON TANK
8	TANK
9	COOLING RADIATORS
10	HANDHOLE & SECURITY COVER
12	LIFTING LUGS
13	JACKING PROVISIONS
14	1/2-13 GROUND PAD
15	1 IN DRAIN VALVE AND SAMPLER
21	PAD LOCKABLE DOOR HANDLE
22	3 PT LATCH PENTA SEC BOLT
24	12 IN REMOVABLE SILL
25	METAL LV-HV BARRIER
39	CLIP ON DRIP SHIELD
41	BAYONET FUSE HOLDER
47	PRESS. REL VALVE
48	DIAL THERM W/MAX POINTER
49	2" MAG LL GAUGE: LV COMP
50	OIL LEVEL PLUG
51	TAP CHANGER HANDLE
56	PROVISIONS FOR LTG ARR
57	PRES VAC GAUGE

SPECIAL NOTES	
A	BAY-O-NET FUSE
	CPS 4000358C18 140 AMP
B	ISOLATION LINK FUSE
	HI A7
C	
D	
E	

CAT NO	9380435444031	
DWG BY:	TT	DATE: 08/16/07
APP BY:	BJ	CC. 745

M	SUGGEST PAD SIZE	56.5 X 52.3
N	SUGGEST HOLE SIZE	42.5 X 13.0

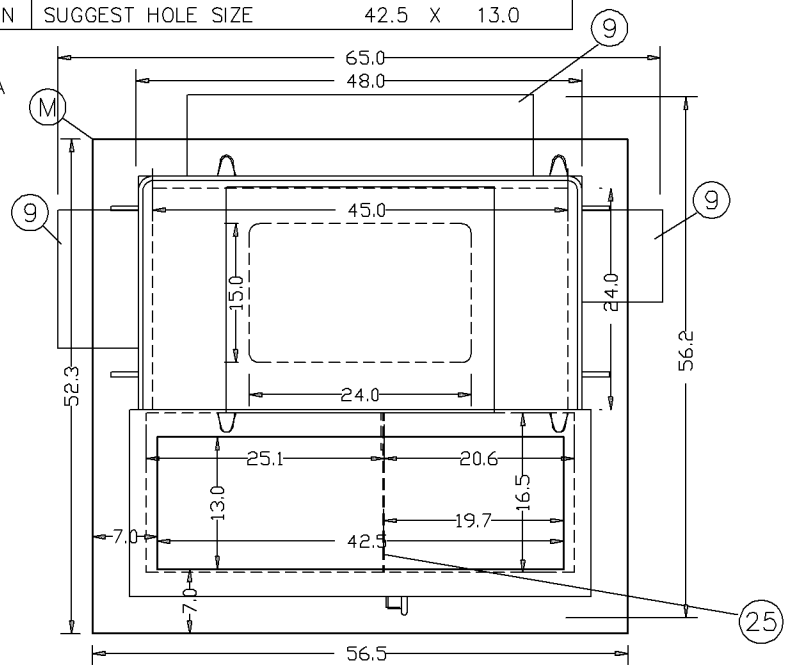

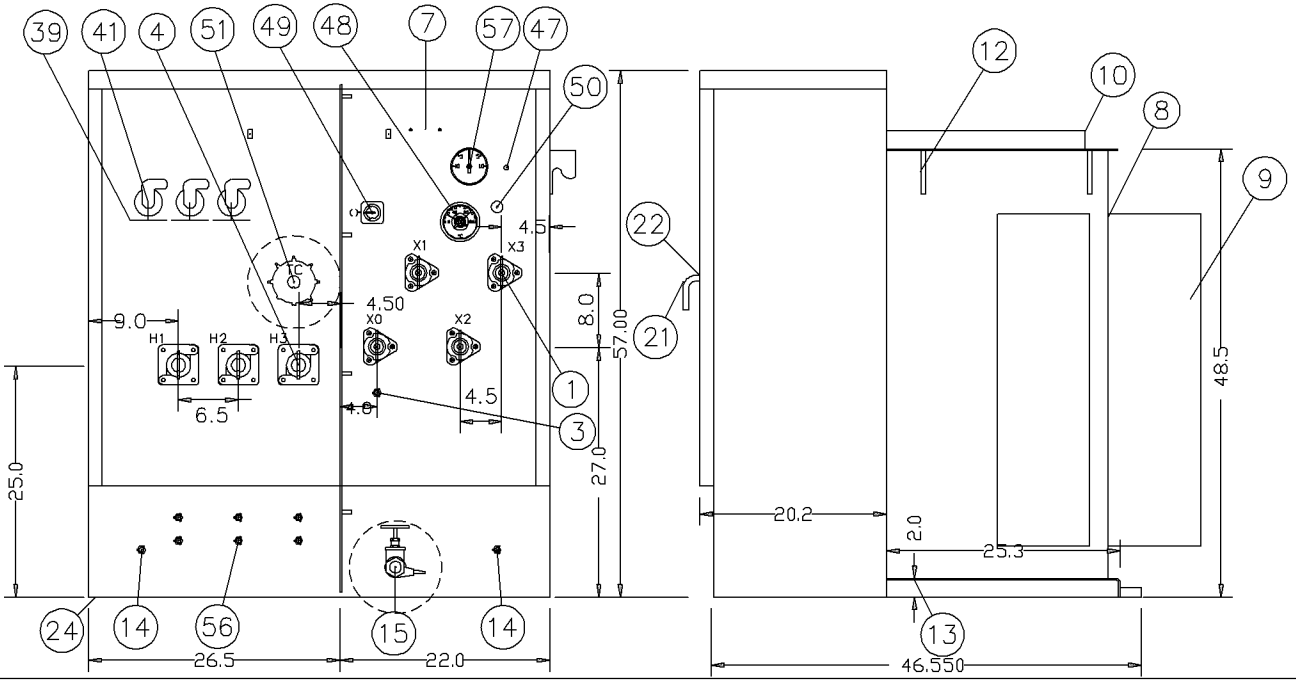

DWG NO.	0073170227.530	
	SUNBELT TRANSFORMER TEMPLE, TEXAS	
CUSTOMER : SUNBELT		
SPEC.	DATED	
KVA	300.0BIL 60 TAPS TS-2 ABOVE 2 BELOW	
HIGH VOLTAGE	2400	
LOW VOLTAGE	480Y/277	
APPROX. CORE AND COIL WEIGHT		1001
APPROX. TANK AND ACCESS. WEIGHT		1255
GAL. OF OIL	183; APPROX. WEIGHT	1373
APPROX. TOTAL WEIGHT		3629

REV.	DATE	DESCRIPTION	BY / APP
A			

ID	3TST1415	P.N. 0073170227.530

9380-435444-031 SUNBELT

0.055

93802301S,CB,510, 0,H01 , 1, 2, EH

464524, 574869,1, 746,2, 5181

59065132.110

3TST1415